


MAIN CIRCUIT AND SUPPORT

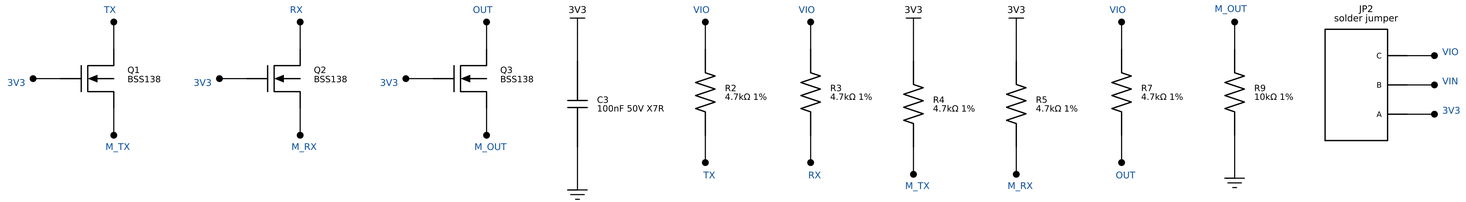

POWER AND INDICATORS

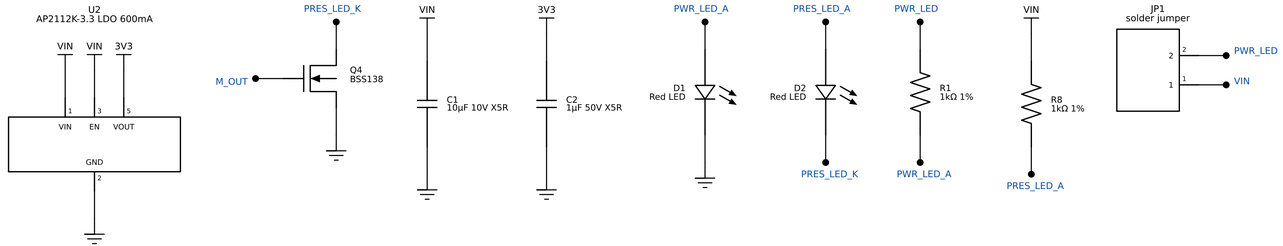

CONNECTORS

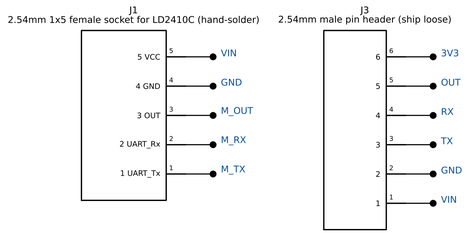

NOTES

Net-label schematic: pins with the same blue net name are connected.

Generated from the verified netlist in the design file rev B (BOM ↔ netlist check passed).

Values and LCSC part numbers: see section 8 of the design file.

JP1 (default Closed): Cut to turn off the power LED

JP2 (default A–C bridged (3V3)): Cut A–C and bridge B–C for 5V-logic hosts (Arduino Uno)

ELECTROTRICAL

ElectroTrical LLC · Dubai

ET-S06 LD2410C 24GHz mmWave Human-Presence Carrier

Rev B · 10 Nov 2026 · Sheet 1/1

Drawn from netlist · JLCPCB parts · Do not scale